


ISO COMPLIANT DISPLAY MODULE

- One Time Password Function
- OATH compliance
- Fit for ISO card standard
- Durability
- Flexibility
- Power Efficiency
- Low cost and in mass production

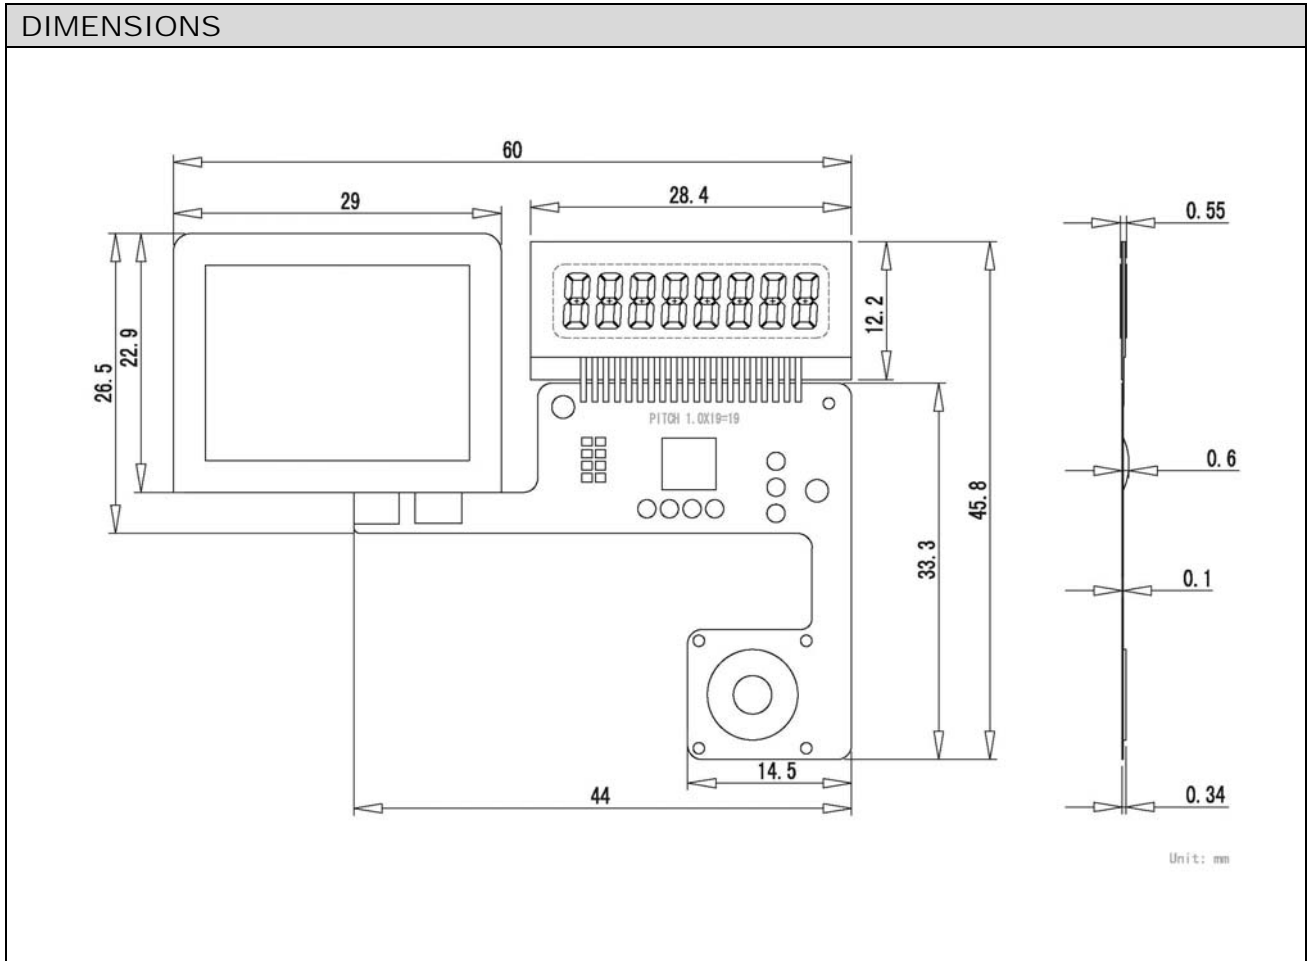

SPECIFICATIONS	
Property	Specification
Display Type	TN LCD (Black Digits and Light Gray Background)
Number of Digits	8
Display Driver	Same as for Normal Glass TN LCD Drive
Display Attachment Type	Heat Seal Connector
Supply Voltage	3.0 V
Sustainable Temperature Limit	-20 C/24 Hours / 70 C/12 Hours
Battery Life	Up to 5 Years in event synchronous mode for 10 use/day
On / Off Button Type	Membrane
Durability & Flexibility	ISO7810 Compliant
Space Left for Embossed Characters (if combining with bank card application)	ISO7811/3 Compliant
Firmware Qualification	OATH Compliant / Event Sync
Operating Temperature	-10 C ~ 50 C
Storage Temperature	22 C ~ 28 C
Production Status	Mass Production

APPLICATIONS
Secure Online Transaction
VPN & WLAN & Intranets Access Control
Physical Access Control
Secure E-mail & Messaging

www.hierstar.com

US Headquarters

HisenseSoft Corp (HierStar)

151 Allegany Road
 Stevensville, MD 21666, USA
 Tel: 410-504-1865
 Email: info@hisensesoft.com

US West Coast Office:

HisenseSoft Corp (HierStar)

Sacramento, CA 95683, USA
 Tel: 916-354-8698
 Email: rwilson@hisensesoft.com

China Headquarters

HierStar Ltd

C-2205 JinYuGuoJi,
 48 Wang Jing Xi Road,
 Chaoyang District,
 Beijing, 100102, China
 TEL: 010-64787346
 FAX: 010-64787024
 E-mail: info@hierstar.com